




PROJ: LPS\_Standards.dwg  
 PEN: \\nables\pen\TS\_penible.tbl  
 USER: slocaw  
 DATE: 12/22/2014  
 DGN: ..\STANDARD\_2014\lps91.dgn

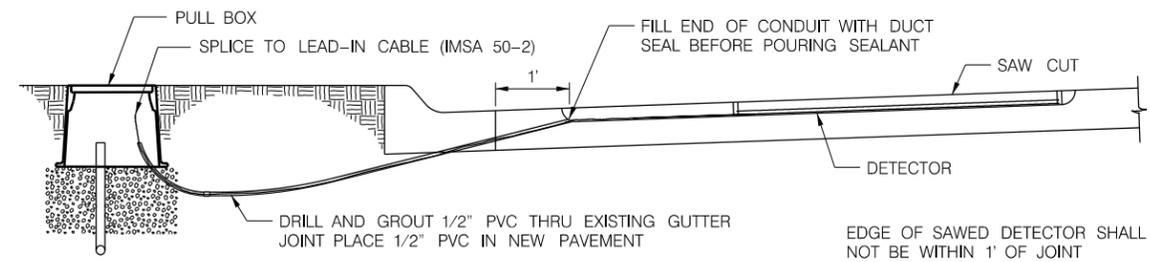


**SAW CUT LOOP DETECTOR DETAIL**

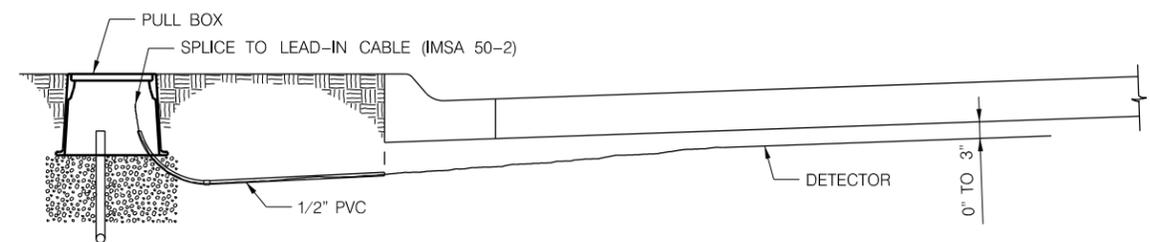


**UNDER COVER (UC) LOOP DETECTOR DETAIL**

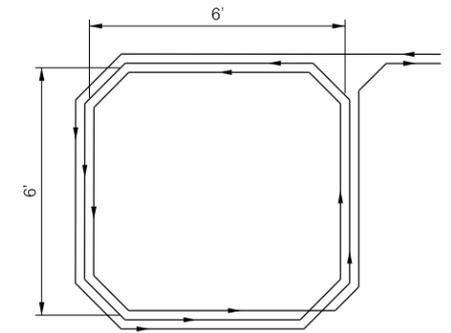

**LOOP DETECTOR WIRE ARRANGEMENT**

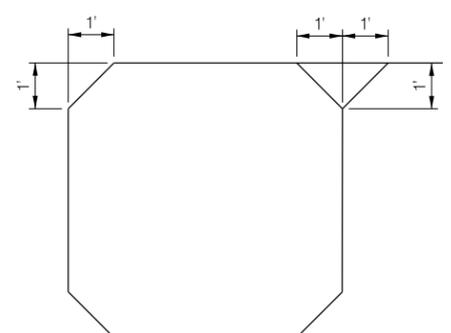


**LOOP DETECTOR SAW CUT CORNER DETAIL**

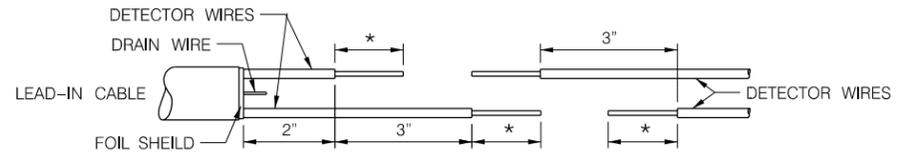


\* STRIP OFF WIRE INSULATION AS REQUIRED BY CONNECTOR MANUFACTURER

STRIP DETECTOR AND LEAD-IN CABLE CONDUCTORS. BEFORE SPLICING SLIP HEAT-SHRINKABLE SILICONE-LINED CROSS-LINKED POLYETHYLENE INSULATING TUBING OVER LEAD-IN CABLE AND INDIVIDUAL CONDUCTORS.




CRIMP THE BARE CONDUCTORS TOGETHER WITH AN APPROVED UNINSULATED BUTT CONNECTOR




SLIDE HEAT-SHRINK TUBING OVER SPLICES. THE TUBING SHALL COVER APPROXIMATELY 1\"/>


**LEAD-IN CABLE SPLICE DETAIL**

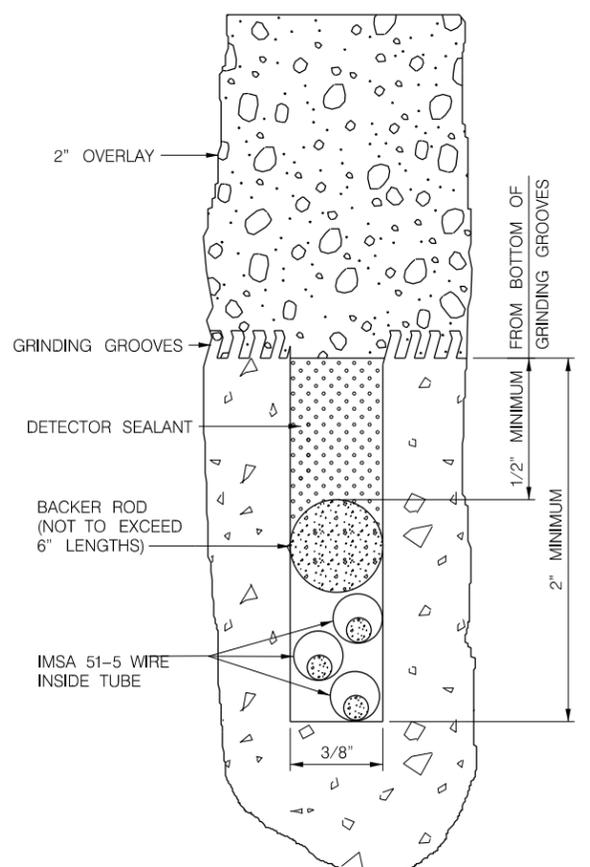

**SAW CUT LOOP DETECTOR SECTION WITH MILL AND OVERLAY**

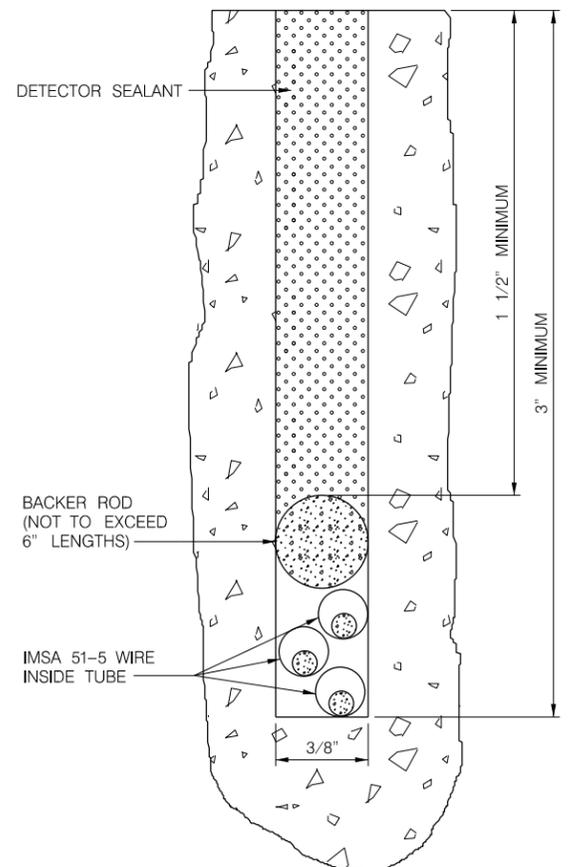

**SAW CUT LOOP DETECTOR SECTION**

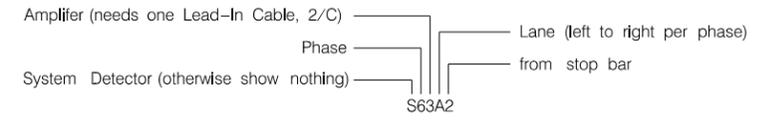

**LOOP DETECTOR NUMBERING**



This document was originally issued and sealed by Lonnie J. Burklund, E-10824, on 11-11-14. This media should not be considered a certified document.