


**ADDENDUM NO. 3  
Pioneers Blvd. Widening Project  
Antelope Creek to Pagoda Lane  
City of Lincoln Project No. 700019  
SPEC. NO. 06-244  
August 25, 2006**


**TO ALL PROSPECTIVE BIDDERS:**

**Note: Bidders are instructed to attach this page of Addendum No. 3 to the inside cover of the contract folder and to sign and fax to Mary Lowe (402-441-6576), as evidence that this Addendum No. 3 has been received. Failure to do so may result in the rejection of the Bid.**

**Company/Contact Person**

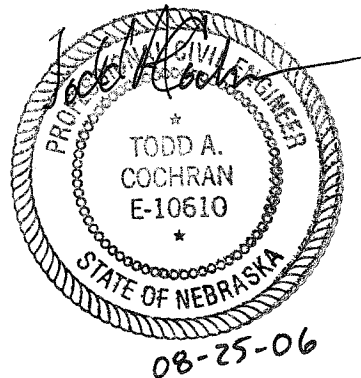

**ADDENDUM NO. 3**  
**Pioneers Blvd. Widening Project**  
**Antelope Creek to Pagoda Lane**  
**City of Lincoln Project No. 700019**  
**SPEC. NO. 06-244**  
**August 25, 2006**

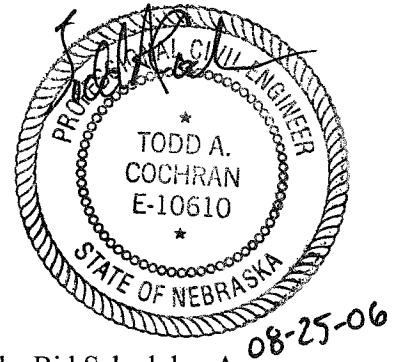

**1. 9" High Early Strength Concrete**

The item 9" High Early Strength Concrete has been deleted completely from the Bid Schedule. A modified Summary of Quantities plan sheet will be provided to the winning bidder. The Section 9" High Early Strength Concrete in the Special Provisions shall be completely deleted and replaced with the following:

**HIGH EARLY STRENGTH CONCRETE**

The Contractor shall provide High Early Strength Concrete for use at roadways as directed by the Engineer to facilitate opening of the roadways. High Early Strength Portland Cement Concrete for roadways and drives shall be City of Lincoln L5500 Concrete.

The Contractor, at his option, may elect to use the High Early Strength Concrete at other locations to facilitate his operations, subject to approval of the Engineer. Use of L5500 concrete without prior approval of the Engineer shall be paid by the Contract Unit Bid Price for 9" PCC Pav't W/Int Curb.

It is anticipated that approximately 3000 Square Yards of high early strength concrete will be used to accommodate traffic. Unit price for 9" High Early Strength Concrete shall be paid at \$3 above Contract Unit Bid Price for the item 9" PCC Pav't W/Int Curb.

Payment for use of 9" High Early Strength Concrete shall be full compensation for furnishing all labor, equipment, materials, and all other incidentals required to complete the work.

**2. Pavement and Sidewalk Removal**

The quantity for the item Pav't and Sidewalk Rem has been modified. See attached Bid Schedule for the modified quantity. A modified Summary of Quantities plan sheet will be provided to the winning bidder.

**3. 9" Portland Cement Concrete Pavement with Integral Curb**

The quantity for the item 9" PCC Pav't W/Int Curb has been modified. See attached Bid Schedule for the modified quantity. A modified Summary of Quantities plan sheet will be provided to the winning bidder.

**4. Storm Sewer Manhole, Number 6, Station 1667+30.00**

The size of the Storm Sewer Manhole, Number 6, at station 1667+30.00 shown on sheet 50 as a 42" shall be a size 54"-60". THIS IS A CORRECTION ONLY TO THE PLAN SHEET AND NOT A MODIFICATION TO THE QUANTITY. A modified plan sheet number 50 will be provided to the winning bidder.