



West “O” Street Trunk Sewer Extension – Phase 2

Project Description

Lincoln Wastewater System (LWWS) proposes to extend the existing 36 inch trunk sewer west from SW 40th Street and the Burlington Northern and Santa Fe Railway (BNSFR) to provide sewer service to areas designated by the Planning Department as Tier I.

The project is divided into three phases for construction. The Phase 2 commences with a connection to the West ‘O’ Street Trunk Sewer-Phase 1 at approximately SW 45th Street, north of the BBNSFR right-of-way. The sewer will service an area bounded by West Holdrege Street, the BNSFR right-of-way, West 56th Street, and West 63th Street.

Bids were received on September 7, 2005, from 7 contractors. Garney Companies Inc. was the successful low bidder for the project with a bid of \$991,896.

Project Summary

Project Information:

Phase 2 – 4,859 LF 30” Sewer, 1,045 LF 15” Sewer

Construction Cost:

\$991,896

Project Schedule:

Bids Received
Executive Order (74462) Signed
Notice to Proceed
Substantial Completion
Final Completion

September 7, 2005
October 10, 2005
January 20, 2006
June 15, 2006
July 15, 2006

Lincoln Wastewater System:

Brian Kramer (402) 441-7987
City Project No. 701019
Specification No. 05-197


HDR (Consulting Engineer):

Kent Prior (402) 742-2906
HDR Project No. 12733

Garney Companies Inc.:

Mike Atkinson (816) 746-7213

\$FILES \$DATES \$TIMES \$USERS\$

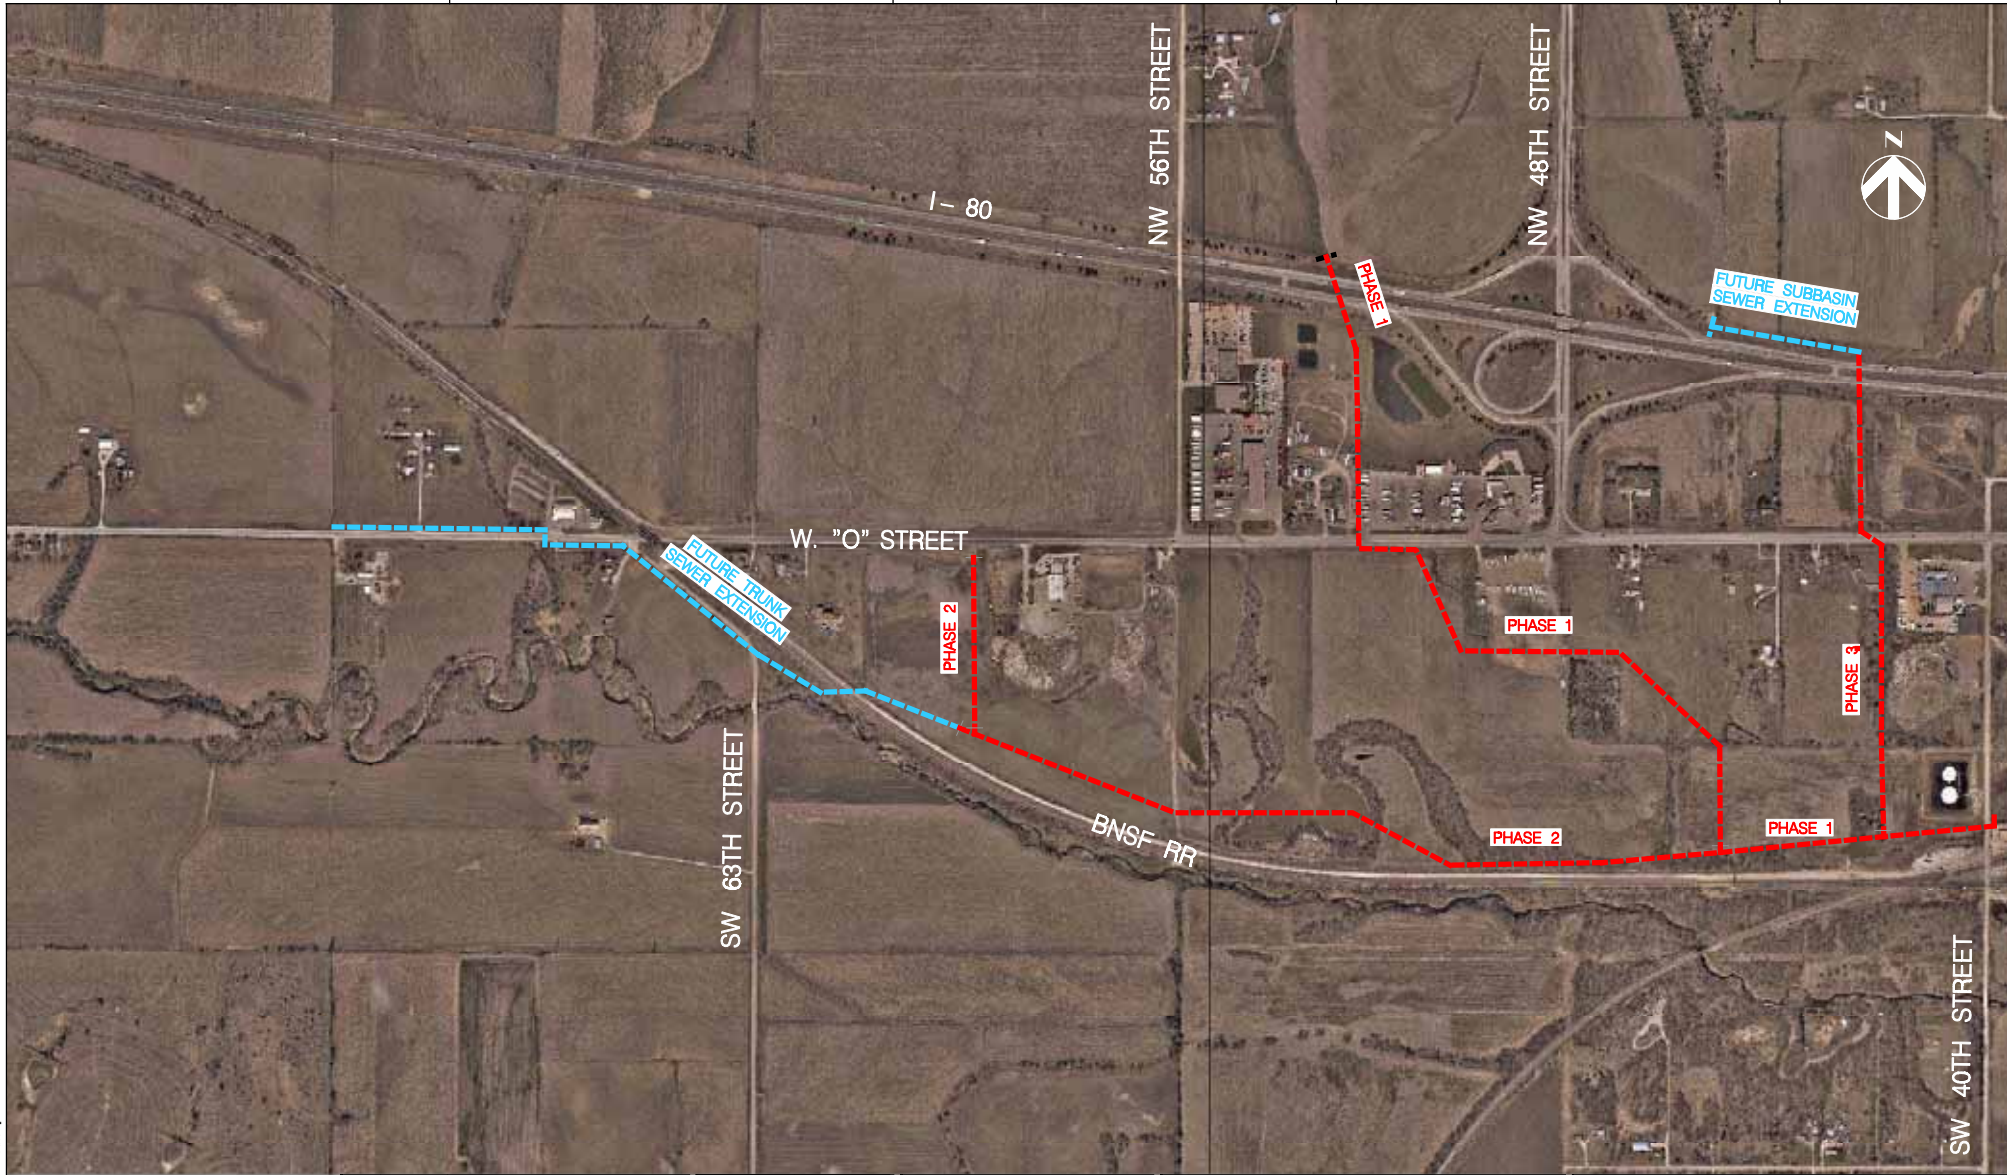

HDR
HDR Engineering, Inc.

ISSUE	DATE	DESCRIPTION

PROJECT MANAGER	KENT PRIOR
CIVIL	SCOTT AURIT
STRUCTURAL	
ARCHITECTURAL	
PROCESS	
MECHANICAL	
ELECTRICAL	
INSTRUMENTATION	
PROJECT NUMBER	12733

PROPOSED
SEWER



FUTURE
SEWER



**West 'O' Street
Trunk Sewer Extension
Lincoln, Nebraska
2006**

**TRUNK SEWER EXTENSION
AND SUBBASIN SEWER PLAN**



FILENAME	
SCALE AS SHOWN	

SHEET