

**ADDENDUM #1
TO SPEC. 04-189
Sanitary Sewer Project 700413
Knox from 44th to 54th Street**

Addendum #1 to Spec. 04-189, bid has been extended and will be opened on **Wednesday, August 11, 2004** at 12:00 noon.

See attached for changes to specifications.


Dated this 3rd day of August, 2004.

Purchasing Department

Mary L. Matson
Assistant Purchasing Agent

**ADDENDUM NO. 1
TO
SANITARY SEWER REPLACEMENT
PROJECT 700413
SPEC. NO. 04-189
KNOW FROM 44TH TO 54TH
CITY OF LINCOLN, NE**

July 28, 2004

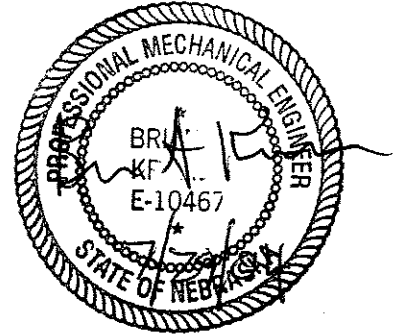

To Prospective Bidders:

The Contract Documents and Specifications, and plans are hereby amended as follows:

Specifications

Entry 1: In the Schedule Of Items, on page 2, Line No. 0035, Change: **Misc. 6" Sanitary Sewer Service Stubout To: 4" Sanitary Sewer Stubout** And Change the Approximate Quantity From 180 L.F. To 250 L.F.

Entry 2: In the Schedule of Items, On Page 3, Line No. 0050, Change: **6" Pipe Sewer Service to 4" Pipe Sewer Service** And Change The Approximate Quantity From 36 Ea. To 82 Ea.

Entry 3: In the Schedule of Items, On Page 3, Line No. 0055, Change: **Misc. 10" X 6" "Y" Fittings to Misc. 10" X 4" "Y" Fittings** And Change The Approximate Quantity From 36 Ea. To 82 Ea.

Entry 3: In the Schedule of Items, On Page 3, Add Line No. 0145. Item No. Description Detectable Warning Panels, Approximate Quantity 50 S.F.

Entry 4: In the Special Provisions For Pipe Bursting Delete the Paragraph for **Schedule**

Entry 5: In the Special Provisions For Pipe Bursting Under **MATERIAL** Delete Paragraph c. **PIPE COLOR AND QUALITY**

Entry 6: In the Special Provisions For Pipe Bursting Under **MATERIAL** Delete Paragraph g. **FORCE MAINS**

Plans

Entry 1: Replace Plans Sheet 1 With The Attached Plan Sheet 1. Under **LINCOLN STANDARD PLANS** We have Added Reference To LSP 640 & LSP 670.

Entry 2: Replace Plans Sheet 2 With The Attached Plan Sheet 2. Quantities For Item 3, 10 & 11 Have Been Changed As Identified In The Specification Section.

Also Revised Note Number 7 To Specify That 48th Street May Not Be Closed To Traffic At Any Time

Entry: Replace Plans Sheet 5 With The Attached Plan Sheet 5. The Boxed Note For Pipe Bursting Has Been Revised To Advise Of A Known Sewer Service Within The Limits Of The Pipe Bursting.

Entry 2: Replace Plans Sheet 6 With The Attached Plan Sheet 6. A Note Has Been Added To Alert The Contractor To The Unknown Separation Between The Existing Sanitary And Water Main Crossing, With Instructions Of Measures To Be Taken In The Event That The Vertical Separation Is Closer Than 18".

Also At Approximately Sta. 15+70 Information Has Been Added Alerting The Contractor To An Alltel Duct Bank, Which Crosses The Sanitary Sewer.

Prepared by:
HWS Consulting Group Inc.
825 "J" Street
Lincoln, NE 68508
(402)-479-2276

Schedule of Items

Contract ID: 700413 Project(s):
 Letting Date: 08-04-04 Call Order: 001

Bidder:

Line No.	Item Description	Approx. Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cts	Dollars	Ct

Section 0001

Alt Group

0005	24.6999 Mobilization	1.000 L.S.				
0010	50.0153 Traffic Control for Construction	1.000 L.S.				
0015	50.2210 Remove Existing Sanitary Sewer Pipe	3,378.000 L.F.				
0020	22.0780 Remove Sanitary Sewer Manhole (Complete)	9.000 Ea.				
0025	22.0070 10" Sanitary Sewer Pipe	3,378.000 L.F.				
0030	50.0005 Misc. Pipe Bursting	75.000 L.F.				
0035	50.0005 Misc. 4" Sanitary Sewer Service Stubout	250.000 L.F.				
0040	22.0700 Standard Manhole, Type "S"	6.000 Ea.				
0045	22.0710 Standard Manhole, Type "S"	56.000 V.F.				

Schedule of Items

Contract ID: 700413 Project(s):
 Letting Date: 08-04-04 Call Order: 001

Bidder:

Line No.	Item Description	Approx. Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cts	Dollars	Ct
0050	22.0850 4" Pipe Sewer Service	82.000 L.F.				
0055	50.0001 Misc. 10" x 4" "Y" Fittings	82.000 Ea.				
0060	01.0046 Pavement Removal	480.000 C.Y.				
0065	01.0220 Type "B" Sawing	4,555.000 L.F.				
0070	01.0130 Concrete Base, 5" Thick	2,711.000 S.Y.				
0075	01.0150 Asph. Conc. Surface Course, For Residential Street	685.000 Ton				
0080	06.0020 Combined Curb & Gutter	2,022.000 L.F.				
0085	01.0264 Milling Asphalt Pavement	4,922.000 S.Y.				
0090	32.0070 Install Storm Drain Inlet Protection	4.000 Ea.				
0095	32.0080 Storm Drain Inlet Protection Maintenance	4.000 Ea.				

Schedule of Items

Contract ID: 700413 Project(s):
 Letting Date: 08-04-04 Call Order: 001

Bidder:

Line No.	Item Description	Approx. Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cts	Dollars	Ct
0100	10.0010 Crushed Rock Surfacing (In Place)	165.000 Ton				
0105	30.0010 Sodding, Complete	2,500.000 S.F.				
0110	01.0065 Sidewalk Removal	274.000 S.F.				
0115	50.0045 Misc. Driveway removal	727.000 S.F.				
0120	07.0005 Concrete Sidewalk, 6" Thick	274.000 S.F.				
0125	07.0030 Concrete Driveway, 6" Thick	727.000 S.F.				
0130	02.0030 Tree Removal (24" to 35")	3.000 Ea.				
0135	02.0040 Tree Removal (36" & Over)	3.000 Ea.				
0140	50.0015 Misc. Construction Staking	1.000 L.S.				
0145	50.0045 Misc. Detectable Warning Panels	50.000 S.F.				

Schedule of Items

Contract ID: 700413 Project(s):
Letting Date: 08-04-04 Call Order: 001

Bidder:

Line No.	Item Description	Approx. Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cts	Dollars	Ct
	Section 0001 Total				0.00	
	Bid Total				0.00	