ADDENDUM NO. 1
TO
CONTRACT DOCUMENTS AND SPECIFICATIONS
FOR
CITY OF LINCOLN, NEBRASKA (2007)
50th and R STREET and 52nd and Q STREET
STORMWATER SYSTEM IMPROVEMNTS PROJECT NO. 702200

HDR Project No. 34113

DATE OF ISSUE: _July 19, 2007

TO: PROSPECTIVE BIDDERS AND OTHER INTERESTED PARTIES

THE CONTRACT DOCUMENTS AND SPECIFICATIONS, INCLUDING THE CONTRACT DRAWINGS, ARE HEREBY MODIFIED BY THE FOLLOWING ITEMS:

CHANGES TO DRAWINGS

AD-1 Item 1 Sheet 2 – SUMMARY OF QUANTITIES

A. DELETE the following bid Items from the Summary of Quantities table:

Clearing and Grubbing	LS	2

AD-1 Item 2 Sheet 2 – SUMMARY OF QUANTITIES

A. INSERT the following bid Items into the Summary of Quantities table:

Erosion and Sediment Control	LS	1

The proposed Erosion and Sediment control practices, in addition to the seeding, include but are not limited to the following:

52nd and Q Street and 50th and R Street:

600 lf of diversion generally along the south easement line see attached Figure 1;
1 each check dam just upstream of the letdown structure, see attached Figure 2;
2 each temporary sediment trap, see attached Figure 3,
one at the west end of the diversion and
one at the beginning of the modular block wall; and
2-100 lf segments of silt fence on the upstream side of the riprap.

B. INSERT the following bid Items into the Summary of Quantities table:

Clearing and Grubbing	LS	1

ALL ITEMS IN CONFLICT WITH THE ADDENDA ARE HEREBY DELETED.

THIS ADDENDUM IS MADE PART OF THE CONTRACT DOCUMENTS AND SHALL BE NOTED ON THE PROPOSAL.

HDR ENGINEERING, INC.

REGISTERED PROFESSIONAL ENGINEER
JOHN W. CAMBRIDGE
19 July 2007
E-6491
STATE OF NEBRASKA

John Cambridge, P.E.

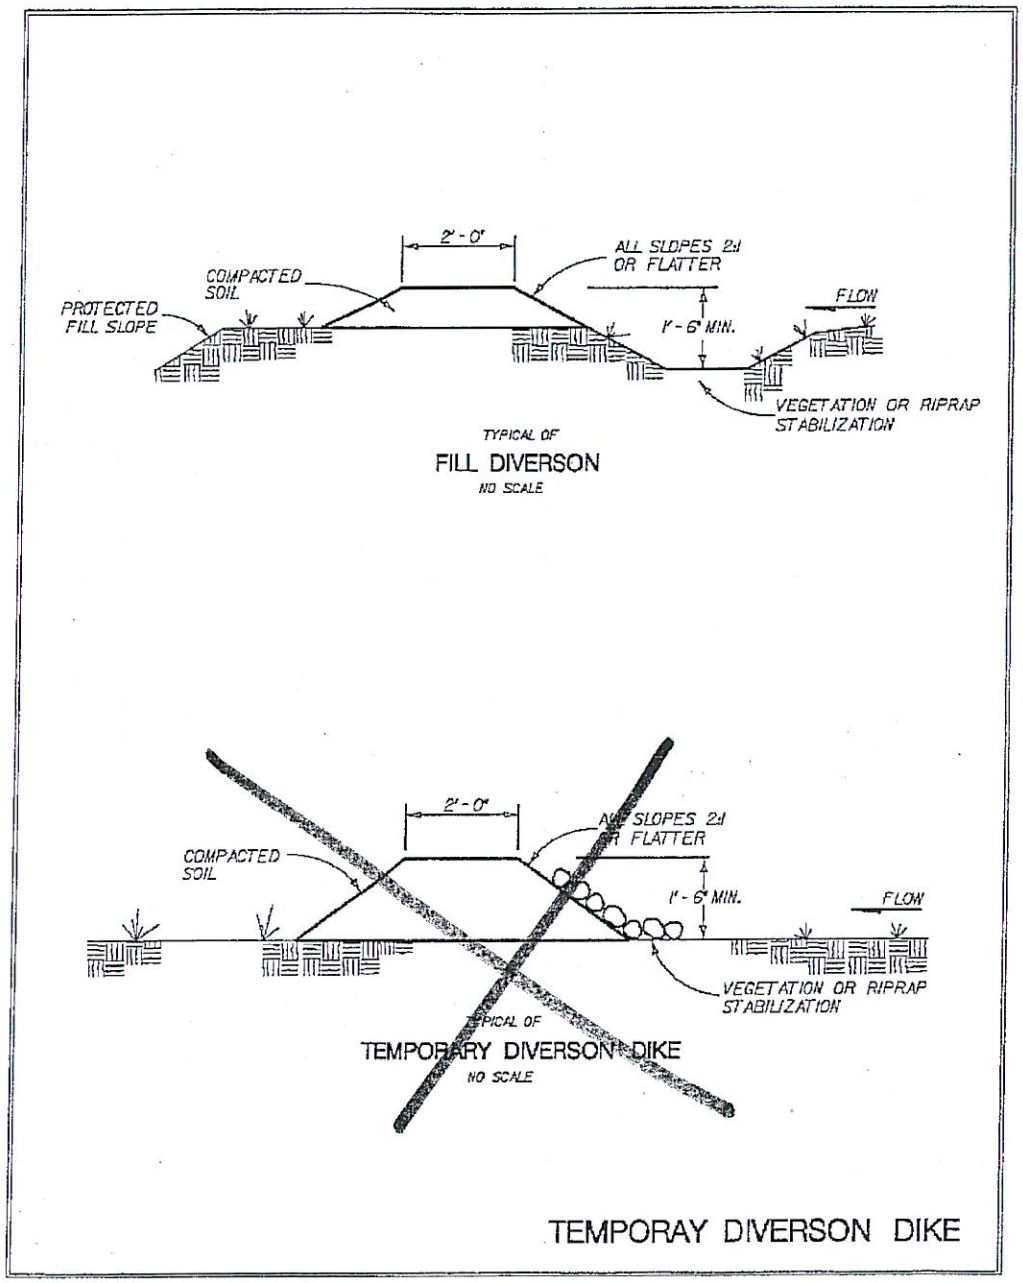

Figure / Temporary Diversion Dike

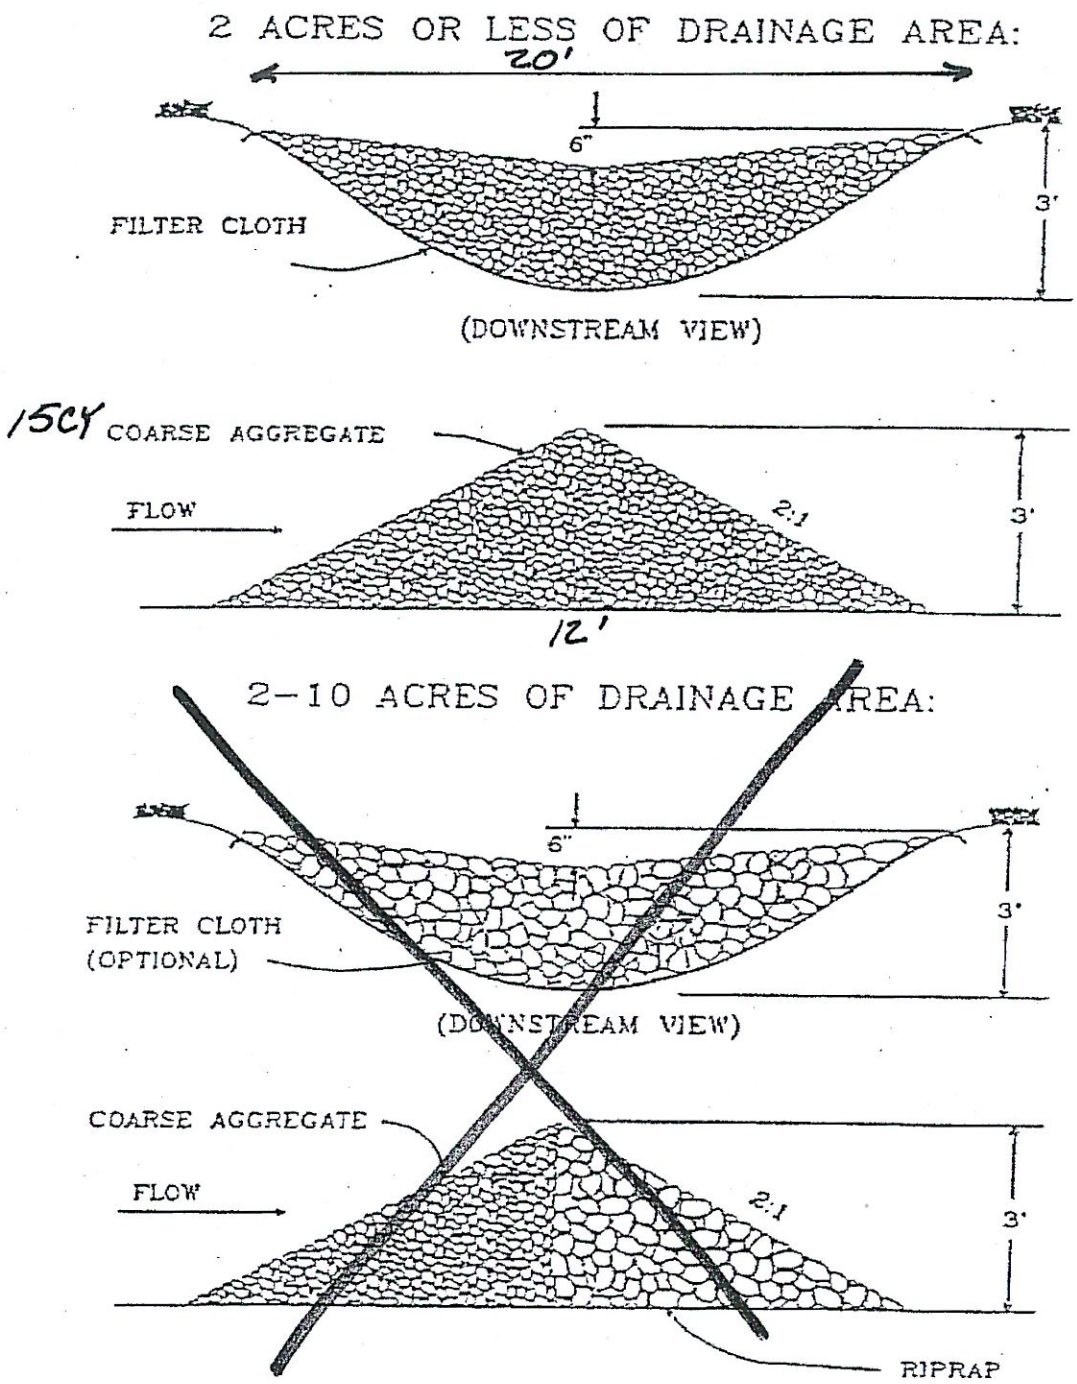

Figure 2. Rock Check Dams

TEMPORARY SEDIMENT TRAP

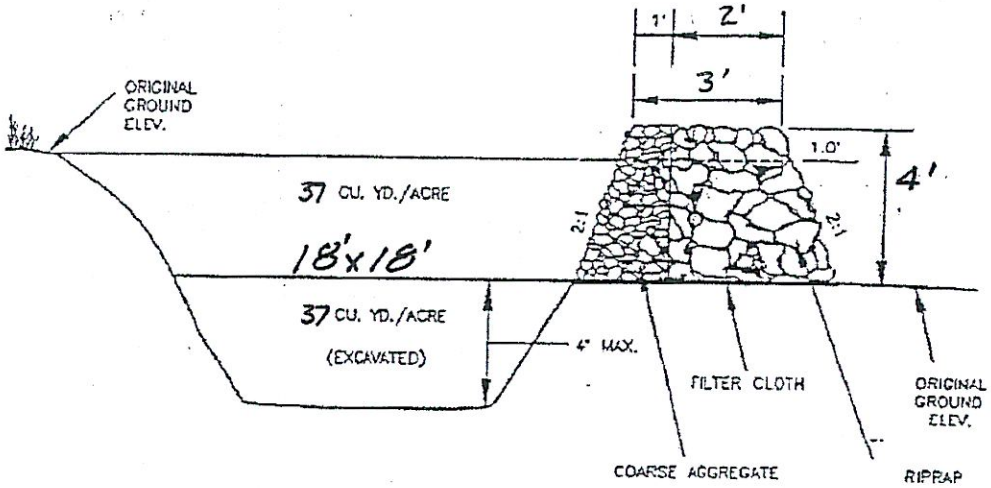

CROSS SECTION OF OUTLET

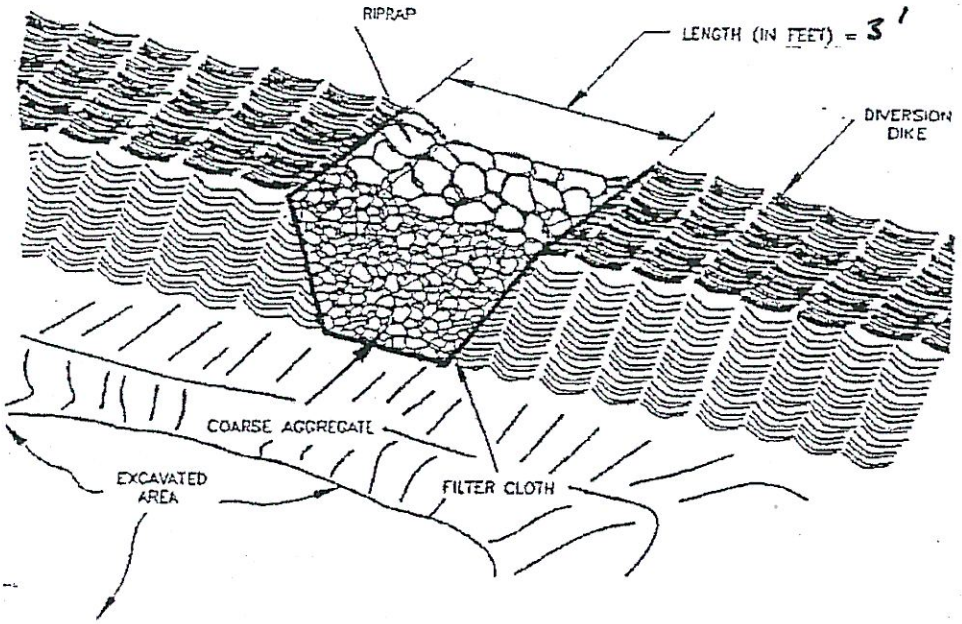

OUTLET (PERSPECTIVE VIEW)

Figure 3 Temporary Sediment Trap

City of Lincoln
Project Item Schedule
702200

Description: 50th & R Drainage Project
Location: 50th & R Vicinity
Work Type: Storm Drainage
Bid Opening Date: 07/25/2007 AT 12:00 noon

Project Items

Item Number		Quantity	Unit	Unit Price	Extension
	Section: 1 Paving Items				
1.0040	AC Pavement, Cl 2 (6" Base)	71	SY	$	$
1.0100	Pavement and Sidewalk Removal	27	CY	$	$
1.0180	Adjust Water Valve Box to Grade, Complete	2	Ea	$	$
1.0210	Type 'A' Sawing	76	LF	$	$
1.0220	Type 'B' Sawing	70	LF	$	$
1.0230	Type 'C' Sawing	8	LF	$	$
2.0010	General Clearing & Grubbing	1	LS	$	$
2.0020	Tree Removal (12" to 23")	13	Ea	$	$
2.0030	Tree Removal (24" to 35")	2	Ea	$	$
2.0040	Tree Removal (36" & Over)	2	Ea	$	$
2.0090	Remove and Replace Fence	283	LF	$	$
2.0100	Earth Excavation	2460	CY	$	$
6.0020	Combined Curb & Gutter	116	LF	$	$
7.0020	4" Concrete Sidewalk	378	SF	$	$
				Section 1 Total:	$
	Section: 2 Erosion Control Items				
30.0050	Seeding, Type "B"	1.2	Ac	$	$

Item Number	Quantity	Unit	Unit Price	Extension
50.0015 Erosion and Sediment Control	1	LS	$	$
			Section 2 Total:	$
Section: 3 Storm Drainage Items				
8.0025 Modular Block Retaining Wall	2269	SF	$	$
21.0030 60" RCP Storm Sewer, Cl. III	206	LF	$	$
21.0070 36" RCP Storm Sewer, Cl. III	126	LF	$	$
21.0520 60" RC FES	2	Ea	$	$
21.0875 Storm Sewer Manhole, 54" (Complete)	1	Ea	$	$
21.0920 Concrete for Structures (In place)	10.4	CY	$	$
21.0930 Reinf. Steel for Structures (In place)	1514	Lb	$	$
21.0940 Concrete for Collars, Elbows, & Headwalls	6.74	CY	$	$
21.0950 Reinf. Steel for Collars, Elbows, & Headwalls	379	Lb	$	$
21.1320 Remove 15" Storm Sewer Pipe	40	LF	$	$
21.1750 Remove Existing Headwall (Complete)	1	Ea	$	$
21.1790 10' RC Low Flow Liner	80	LF	$	$
21.2090 Geotextile Filter Fabric (In place)	130	SY	$	$
21.2111 Rip-rap (In place)	369	Ton	$	$
50.0010 Misc. Storm Sewer Inlet	1	Ea	$	$
50.0010 Flood Warning Signal System	1	Ea	$	$
50.0010 Concrete for Slugging Stone Strong Blocks	51	CY	$	$
50.0010 Concrete for Footing under Stone Strong Blocks	65.9	CY	$	$
			Section 3 Total:	$

Item Number	Quantity	Unit	Unit Price	Extension
Section: 4 Miscellaneous Items				
0.2000 Construction Staking	1	LS	$	$
0.4000 Mobilization	1	LS	$	$
50.0010 Remove and Reset Bollards	4	Ea	$	$
			Section 4 Total:	$
			Estimate Total:	

Company Name: _____

Signature: _____ **Date:** _____