

# Proposed Access During Intersection Construction

(Full Closure at 56th and Old Cheney)



OLD CHENEY RD

Open to Local Businesses

Temporary Median Opening During 56th and Old Cheney Intersection Closure

OPEN

OPEN

HWY 2

Limits of Intersection Repairs

OPEN

Open to Local Businesses

OPEN

Open to Local Businesses

OPEN

Temporary Median Crossing During 56th and Old Cheney Intersection Closure

OPEN

OPPD RAILROAD

58TH ST

56TH ST

Open to Local Businesses

WALTZ RD

OPEN

OPEN

PRELIMINARY PLAN  
NOT FINAL - SUBJECT TO CHANGE



# Proposed Detour Map



48TH ST INTERSECTION  
RESTRICTED TURNING MOVEMENTS

56TH ST INTERSECTION  
TEMPORARY CLOSURE

**LEGEND** 

-  Potential Temporary 4(f) Impacts to Old Cheney Trail
-  Old Cheney Trail Detour
-  48th Street Detour
-  56th Street Detour

**PRELIMINARY PLAN**  
NOT FINAL - SUBJECT TO CHANGE

OLD CHENEY RD

OLD CHENEY RD

PINE LAKE RD

S 40th ST

S 48th ST

S 56th ST

S 70th ST

S 40th ST

S 56th ST

HWY 2

# Proposed Projects In The Area

CN 13284 (Currently Under Construction)  
**Nebraska Highway 2 Resurfacing**  
from 10<sup>th</sup> Street to Old Cheney Road

702680 | CN 13253  
**48<sup>th</sup> Street & Highway 2**  
Signal Replacement

701862 (Construction Completed)  
**Curb Ramps along Old Cheney Road**  
from 40<sup>th</sup> Street to Highway 2

540041 | CN 13315  
**Old Cheney Road Pavement Repair**  
from 40<sup>th</sup> Street to Highway 2

701829B  
**48<sup>th</sup> Street & Old Cheney Road**  
Drainage Improvements

701923 | CN 13141 (Currently Under Construction)  
**56<sup>th</sup> Street Reconstruction**  
from Shadow Pines Drive to Old Cheney Road


701765  
**Pine Lake Road Reconstruction**  
from 61<sup>st</sup> to Highway 2

701924 (Currently Under Construction)  
**Yankee Hill Road Reconstruction**  
from 70<sup>th</sup> Street to Highway 2

**Construction Year**

- 2015
- 2016
- 2017
- 2018
- 2019

**PRELIMINARY PLAN**  
NOT FINAL - SUBJECT TO CHANGE

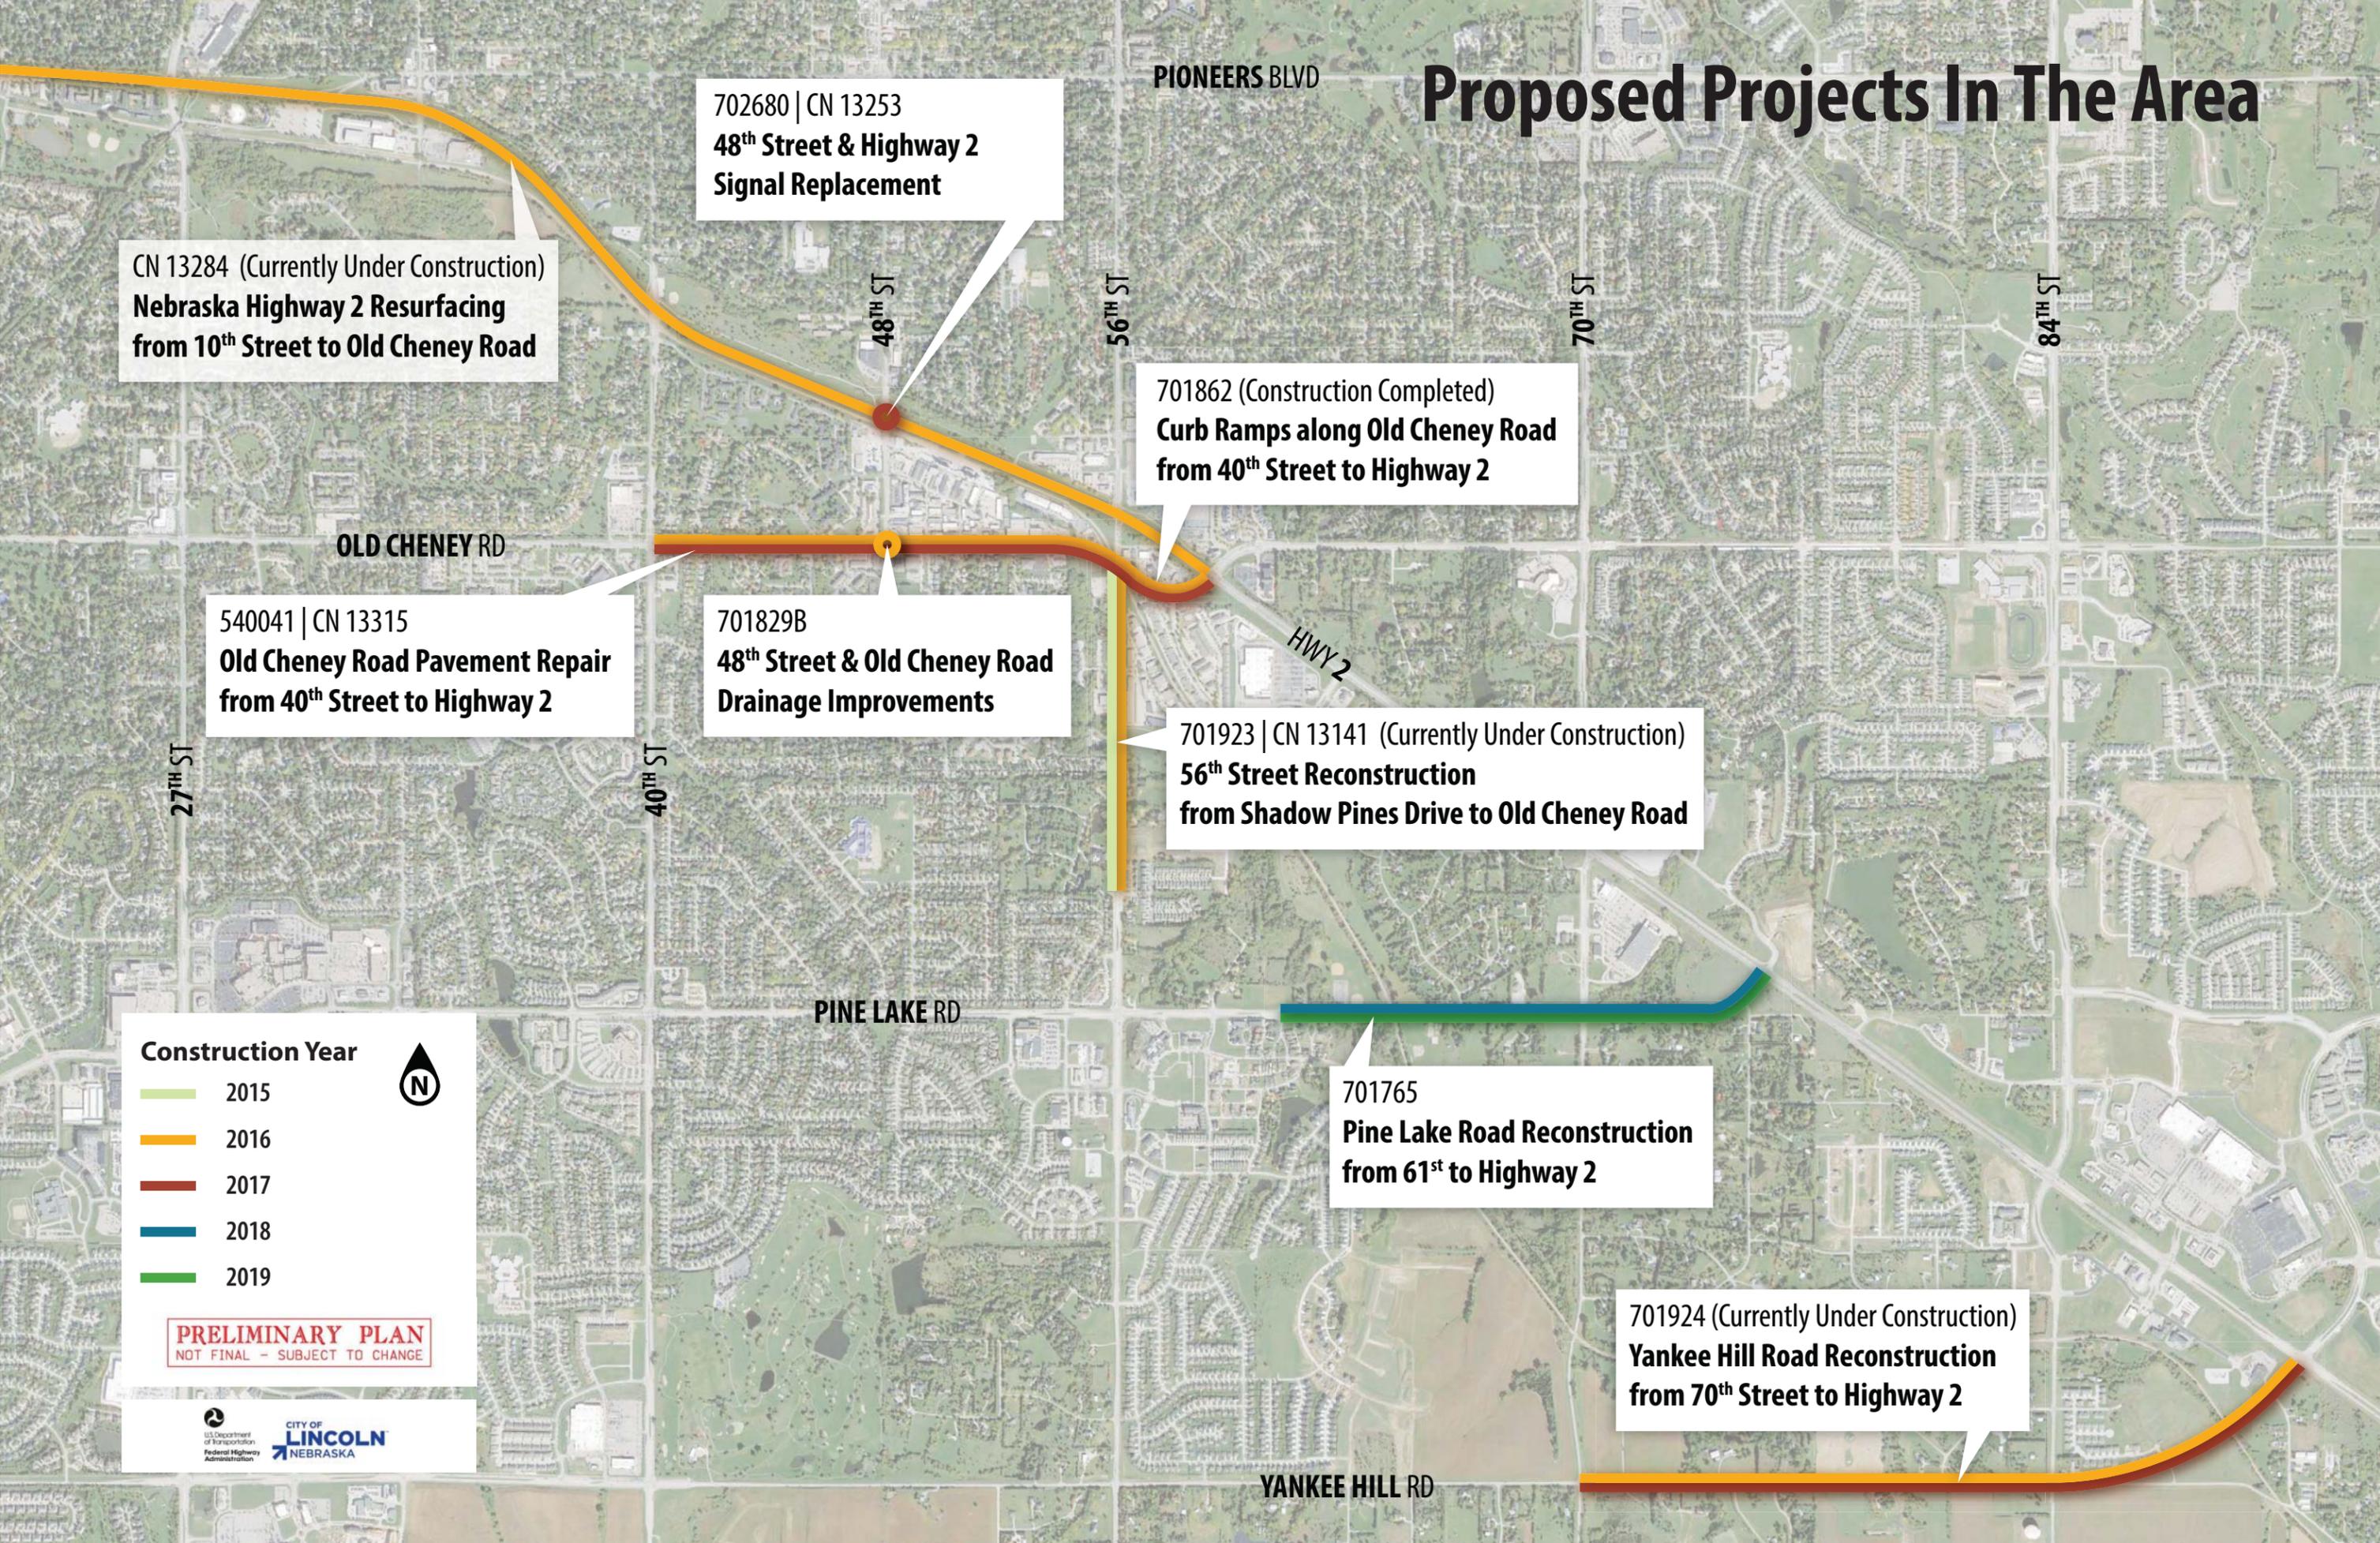

# OLD CHENEY PAVEMENT REPAIR PROJECT

## 40th Street to Highway 2

LCLC - 5202(9), C.N. 13315, City 540041

### ALTERNATIVES CONSIDERED

	Scope of Work / Type of Concrete	Traffic Control / Access	Minimum Safety Standards	Daily Construction	Estimated Duration (days)	Minimum Quality Standards	Cost Relative to Preferred
1	Repair w/47B	Full Intersection Closure	Exceeds	Standard	24	Yes	93%
2	Repair w/47B-HE	Full Intersection Closure	Exceeds	Standard	14	Yes	100%
3	Repair w/PR3	Full Intersection Closure	Meets	Night Time Only	14	No	164%
4	Repair w/47B-HE	Lane Closure Only	Meets	Standard	28	Yes	137%
5	Repair w/PR3	Lane Closure Only	Meets	Night Time Only	24	No	218%
6	Full Reconstruction w/47B	Full Intersection Closure	Exceeds	Standard	28	Yes	154%
7	Full Reconstruction w/47B-HE	Full Intersection Closure	Exceeds	Standard	14	Yes	164%

Preferred     Not Viable

