

Street Cuts

Plumber and Excavation Permitting



Checklist

- Authorized Excavation Permit
- Prior to Start, Give Two Business Days Notice to LTU. Call 402-441-7711
- Subcontract Traffic Control to ATSSA/IMSA Certified Company
- Agree to LTU Terms and Conditions (Includes Warranty)

Traffic Control

Traffic Control helps maintain a safe public right-of-way. Traffic control is required to occupy or expose all excavations in the right-of-way.

- **All protective barriers must be maintained by the contractor until all work is completed or the danger eliminated.**
- Contractors must be on site within **one hour** of lane closure(s) setup, unless given prior approval by the LTU Right-of-Way Services.
 - Inspect work zone devices
 - Initial closure setup(s) are not allowed during peak hours (7 - 8:00 a.m. and 3:30 - 6:00 p.m.)
 - Sidewalk on both sides of a street cannot be closed or restricted at the same time.
- For a full list of requirements, go to lincoln.ne.gov (Search: Traffic Control)



Removal and Restoration

Removal and restoration guidelines help protect and preserve early surface replacement, which in turn saves an extensive amount of time and money. Guidelines include:

- Existing Brick Street/Alleyway must be removed uncut and installed in whole
- Restoration of surfaces must match the color, texture, and pattern of the surrounding special surfaces.
- Reinforcement of concrete pavement must be 18" tie bars drilled into Longitudinal joints and smooth bars into transverse joints along the same horizontal plane (See Reinforcement Detail Graphic Below)



Meet City Standards

Documentation of testing and material must be available from the contractor upon request. This includes:

- Supplier Receipts
 - Concrete
 - Asphalt
 - Reinforcement
- Backfill Per City Standards
- Take Photos Before, During and After Project

**LINCOLN
STANDARDS
QR CODE**





Backfill must be suitable material and compacted to City specification standards.

- Unsuitable excavated material must be removed from the site that same day
- Backfill material must be covered and protected
- Compaction methods must be by vibratory plates, mechanical rollers, and/or hand air compactors

Street Cut Detail

Reinforcement Detail

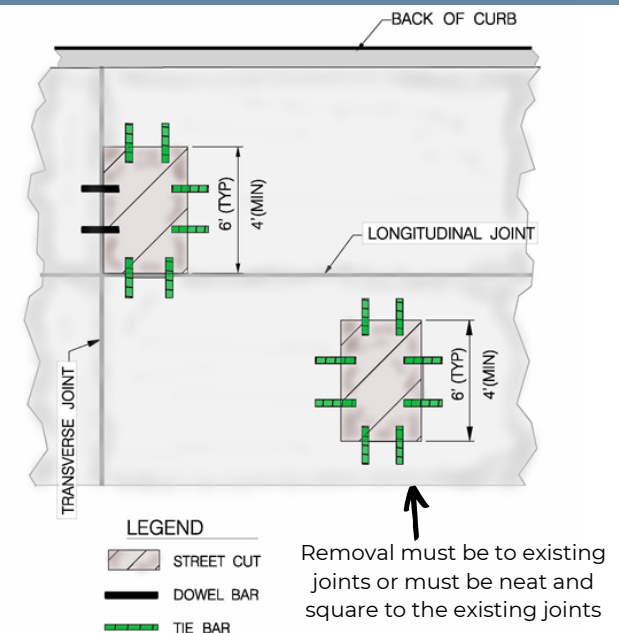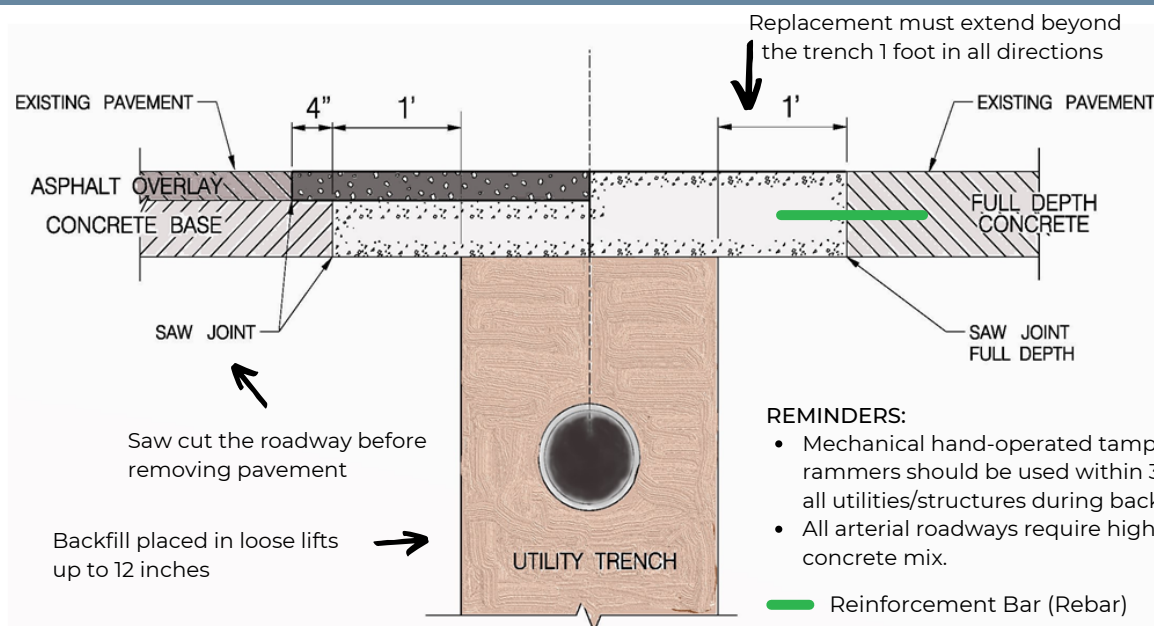

Helpline

Lincoln Transportation and Utilities (LTU): 402-441-7711

Consult with LTU Inspectors for:

- Preconstruction Review
- Construction Questions
- Inspections

Inspectors:

North Of "A" St:

Greg Topil (402) 416-5150

South Of "A" St:

Greg Stohs (402) 416-5147



Right-Of-Way Superintendent:

Shane Dostal (402) 525-7852

*Verbal/non-written discussion shall not relieve the permittee of any legal obligations under City ordinance/policy. Permittee must provide the City with an accepted plan for correction of failures within 24 hours of notice. (Lincoln Municipal Code: Chapter 14.29 Bonds/Insurance, Chapter 14.70 Contractor Expectations, Chapter 14.92 Site Conditions, and Chapter 14.110 Violations/Penalties)

